

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

FO 104269 R/R (7)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G02B 6/16		A1	(11) International Publication Number: WO 99/42869
			(43) International Publication Date: 26 August 1999 (26.08.99)
(21) International Application Number: PCT/US99/03403 (22) International Filing Date: 17 February 1999 (17.02.99) (30) Priority Data: 60/075,754 23 February 1998 (23.02.98) US (71) Applicant (for all designated States except US): CORNING INCORPORATED [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): LIU, Yanming [CN/US]; 41 Glendale Drive, Horseheads, NY 14845 (US). (74) Agent: CARLSON, Robert, L.; Corning Incorporated, Patent Dept., SP FR 02-12, Corning, NY 14831 (US).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: LOW SLOPE DISPERSION MANAGED WAVEGUIDE

(57) Abstract

Disclosed is a single mode optical waveguide fiber having alternating segments of positive and negative dispersion and dispersion slope. The relative indexes, the refractive index profiles and the radii of the segments are chosen to provide low total dispersion and dispersion slope. One embodiment consists of a first central major index profile (10) of outer radius r_1 , surrounded by a first annular segment (12) of outer radius r_2 , surrounded by second annular segment (14) of outer radius r_3 . Preferred waveguides in accordance with the invention exhibit a dispersion over the range of 1520 to 1625 nm which at all times have a magnitude which is less than 2, and more preferably less than 1 ps/nm²-km. The total dispersion of the waveguide fiber is in the range of about -2.0 to +2.0 ps/nm-km at 1550 nm. The waveguide also features a low polarization mode dispersion.

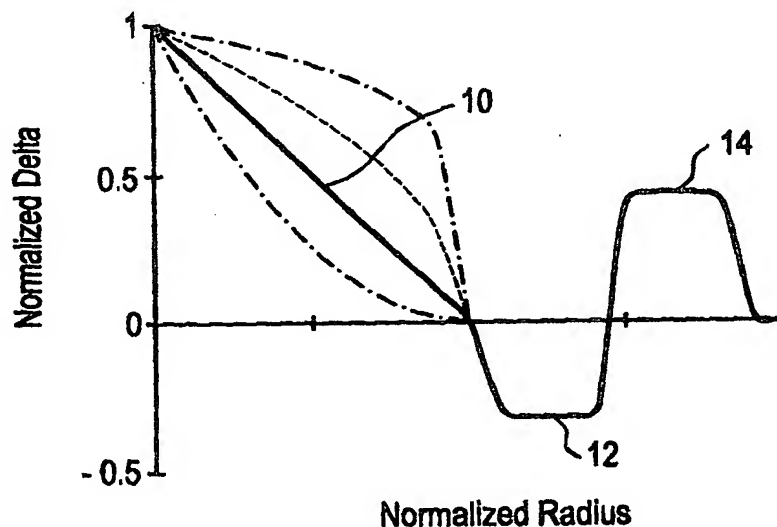

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

LOW SLOPE DISPERSION MANAGED WAVEGUIDE

5

Field of the Invention

10 The present invention is directed to a single mode optical waveguide fiber designed for long repeater spacing, high data rate telecommunication systems. In particular, the single mode waveguide combines excellent bend resistance, low attenuation, low dispersion and low dispersion slope, features that are desired for long distance transmission applications.

15

Technical Background

 The requirement in the telecommunication industry for greater information capacity over long distances, without electronic signal regeneration, has led to a reevaluation of single mode fiber index profile design.

20

 Recent developments in erbium-doped fiber amplifiers (EDFAs) and wavelength division multiplexing have enabled high-capacity lightwave systems. In order to achieve high capacity, channel bit rate and signal wavelength ranges can be increased. When bit rate is increased beyond 2.5
25 Gb/s, fiber dispersion has been a major degradation for long distance. On the other hand, if the dispersion is too low, multi-channel interactions can cause

four-wave mixing and degrade system performance. In order to reduce both the dispersion and FWM degradations, dispersion management has been proposed and demonstrated. Dispersion management can be achieved by both cable management where +D and -D fibers are spliced alternatively and fiber management where core canes with +D and -D properties are combined to draw into one fiber.

Thus far, dispersion managed fibers using +D and -D fibers with positive dispersion slope have been proposed wherein the final fiber dispersion has a dispersion and slope similar to dispersion-shifted fiber, in other words, net zero dispersion is in the 1550 nm window and the total dispersion slope is positive. However, there is still a need for alternative designs of dispersion managed waveguides.

Definitions

The following definitions are in accord with common usage in the art. The index of refraction profile is defined in terms of the radii of segments of similar refractive indices. A particular segment has a first and a last refractive index point. The radius from the waveguide centerline to the location of this first refractive index point is the inner radius of the core region or segment. Likewise, the radius from the waveguide centerline to the location of the last refractive index point is the outer radius of the core segment.

The segment radius may be conveniently defined in a number of ways, as will be seen in the description of Fig. 1 below. In Figs. 1-3, from which Tables 1 & 2 are derived, the radii of the index profile segments are defined as follows, where the reference is to a chart of Δ % vs. waveguide radius:

- * the outer radius of central major index profile, r_1 , is measured from the axial centerline of the waveguide to the intersection of the extrapolated central index profile with the x axis, i.e., the Δ % = 0 point;

- * the outer radius, r_2 , of the first annular segment is measured from the axial centerline of the waveguide to the intersection of the extrapolated or actual central index profile with the x axis, i.e., the Δ % = 0 point;

*the outer radius, r_3 , of the second annular segment is measured from the axial centerline of the waveguide to the intersection of the extrapolated central index profile with the x axis, i.e., the $\Delta \% = 0$ point;;

*the outer radius of any additional annular segments is measured analogously to the outer radii of the first and second annular segments; and,

*the radius of the final annular segment is measured from the waveguide centerline to the midpoint of the segment.

The width, w , of a segment is taken to be the distance between the inner and outer radius of the segment. It is understood that the outer radius of a segment corresponds to the inner radius of the next segment.

- The relative index, Δ , is defined by the equation,

$\Delta \% = 100 \times (n_1^2 - n_2^2) / 2n_1^2$, where n_1 is the maximum refractive index of the index profile segment 1, and n_2 is a reference refractive index which is taken to be, in this application, the refractive index of the clad layer.

- The term refractive index profile or simply index profile is the relation between $\Delta \%$ or refractive index and radius over a selected portion of the core.

-The term α -profile refers to a refractive index profile expressed in terms of $\Delta(b) \%$, where b is radius, which follows the equation,

$\Delta(b) \% = \Delta(b_0)(1 - [|b - b_0| / (b_1 - b_0)]^\alpha)$, where b_0 is the radial point at which the index is a maximum and b_1 is the point at which $\Delta(b) \%$ is zero and b is in the range $b_0 \leq b \leq b_1$, where Δ is defined above, b_0 is the initial point of the α -profile, b_1 is the final point of the α -profile, and α is an exponent which is a real number.

Other index profiles include a step index, triangular, trapezoidal, and rounded step index, in which the rounding is typically due to dopant diffusion in regions of rapid refractive index change.

- Total dispersion is defined as the algebraic sum of waveguide dispersion and material dispersion. Total dispersion is sometimes called chromatic dispersion in the art. The units of total dispersion are ps/nm-km.

- The bend resistance of a waveguide fiber is expressed as induced attenuation under prescribed test conditions. Standard test conditions include 100 turns of waveguide fiber around a 75 mm diameter mandrel and 1 turn of waveguide fiber around a 32 mm diameter mandrel. In each test condition the

bend induced attenuation, usually in units of dB/(unit length), is measured. In the present application, the bend test used is 5 turns of the waveguide fiber around a 20 mm diameter mandrel, a more demanding test which is required for the more severe operating environment of the present waveguide fiber.

5

Summary of the Invention

One aspect of the present invention relates to a single mode optical waveguide comprising a first fiber component segment having a positive dispersion and a positive dispersion slope, and a second fiber component segment which has a negative dispersion and a negative dispersion slope, wherein the waveguide alternates along its length between segments of the first fiber component and the second fiber component, and wherein the first fiber component segment has a length which is at least two times the length of the second fiber component segment. The waveguide is optimized for the lower attenuation operating wavelength window around 1550 nm, i.e., in the window between about 1520 to 1625 nm.

The waveguide in accordance with the invention may be comprised of a unitary fiber having the various first and second segments therein, e.g., alternating sections of positive and negative dispersion and dispersion slope. Alternatively, the waveguide may be comprised of a cable in which the various fiber component sections are connected along the length of the cable.

Another aspect of the present invention relates to a single mode optical waveguide which manages fiber chromatic dispersion by providing a small total dispersion and a low dispersion slope. Preferred waveguides in accordance with the invention exhibit a dispersion over the range of 1520 to 1625 nm which at all times has a magnitude which is less than 2, and more preferably is less than 1 ps/nm²-km. The total dispersion of the waveguide fiber is in the range of about -2.0 to +2.0, more preferably about -1.0 to +1.0, and most preferably about -0.5 to +0.5 ps/nm-km at 1550 nm. The n_1 , Δ_1 %, and the refractive index profiles of the various positive and negative dispersion segments are also selected to provide a total attenuation at 1550 nm no greater than 0.25 dB/km.

All of these properties are achieved while maintaining high strength, good fatigue resistance, and good bend resistance, i.e., an induced bend loss no greater than about 0.5 dB, for 1 turn about a 32 mm mandrel, and no greater than .05 dB for 100 turns around a 75 mm mandrel. The waveguides in accordance with the invention are also compatible with optical amplifiers. Also, cut off wavelength of fiber in cabled form is less than 1520 nm. An added benefit is a polarization mode dispersion less than about .5 ps/(km)^{1/2}, more preferably less than .3 ps/(km)^{1/2} and typically about 0.1 ps/(km)^{1/2}.

Additional features and advantages of the invention will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the invention as described herein, including the detailed description which follows, the claims, as well as the appended drawings.

It is to be understood that both the foregoing general description and the following detailed description are merely exemplary of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as it is claimed. The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate various embodiments of the invention, and together with the description serve to explain the principles and operation of the invention.

Brief Description of the Drawings

Fig. 1 illustrates a negative dispersion fiber segment profile for use in accordance with the invention.

Fig. 2 illustrates an alternative negative dispersion fiber segment index profile in accordance with the invention.

Fig. 3 illustrates an alternative and preferred negative dispersion fiber segment profile.

Fig. 4 illustrates the dispersion characteristics of a alternating +D and - D segment fiber in accordance with the invention.

Fig. 5 illustrates the dispersion vs. distance of a dispersion flattened and dispersion managed fiber in accordance with the invention.

Fig. 6 illustrates the dispersion vs. wavelength curve for a dispersion flattened and managed fiber in accordance with the present invention.

5

Detailed Description of the Preferred Embodiments

Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are described with assistance by the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

10

In the present invention, a low slope and dispersion managed fiber optical waveguide is accomplished by incorporating alternating segments of a first fiber component having a positive dispersion and positive dispersion slope, and a second fiber component having a negative dispersion and a negative dispersion slope, wherein the first fiber component has a length which is at least two times, more preferably at least three times and most preferably at least five times the length of the second fiber component.

15

The waveguides of the present invention may be in the form of a unitary fiber having alternating sections of positive and negative dispersion and dispersion slope. Such a fiber could be manufactured, for example, by assembling alternating core tablets having desired index profiles within a tube or other support device. The alternating core tablets would create the desired alternating positive and negative dispersion characteristics. The tube containing these alternating component tablets can then be overclad with a silica cladding layer, and the resultant preform consolidated and drawn into a continuous fiber which exhibits alternating sections of positive and negative dispersion and dispersion slope along its length. Such manufacturing techniques are further disclosed, for example, in U.S. Patent Application Serial No. 08/844,997, filed April 23, 1997, the specification and drawings of which is incorporated herein by reference in its entirety.

20

25

30

In an alternative embodiment, the waveguide consists of a cabled waveguide. For example, the waveguide may consist of a first fiber component having positive dispersion and positive dispersion slope, having a length of at least 50 km, and more preferably at least 75 km in length, and the second fiber component (negative dispersion and negative dispersion slope) having a length of less than 20 km, but more preferably less than 15 km in length. Such a cabled waveguide may be disposed between amplifiers in an optical fiber communication system. The second fiber component can alternatively be placed in the amplifier side inside the amplifier or amplifier module itself.

The first fiber component, i.e., that having positive dispersion and positive dispersion slope, can be provided by utilizing conventional single mode fiber, such as SMF 28 which is available from Corning Incorporated. SMF-28 has a total dispersion of 17 ps/nm.km, and a dispersion slope of 0.06 ps/nm².km at 1550 nm.

A variety of fiber profiles can be employed to provide the second fiber component which has a negative dispersion and negative dispersion slope. In a preferred embodiment of the invention, the negative component fiber segment has at three or four segments to the profile.

Fig. 1 illustrates one embodiment of such a preferred three segment profile for the negative dispersion, negative dispersion slope fiber segment component. The profile in Fig. 1 consists of a first central major index profile 10 of outer radius r_1 , surrounded by a first annular segment 12 of outer radius r_2 , surrounded by second annular segment 14 of outer radius r_3 . A variety of profile shapes can be employed, as illustrated, for example, by the dashed lines associated with possible profile shapes for the first central major index profile 10 in Fig. 1.

The novel single mode optical waveguide is characterized by its segmented core design that provides the unusual combination of properties set forth herein. These properties are achieved by selecting a proper refractive index profile shape of each of the segments and selecting the appropriate relative refractive index delta, Δ_i %, and radial extent, r_i , of the segments. The profile parameters are known to interact. For example, a center region α -

profile having an α of about 1, will have a radius different from a center region having a trapezoidal index to provide fibers having essentially identical properties.

The index profiles of the respective segments can be virtually any particular shape, including an α -profile, a step index profile, or a trapezoidal profile. Unless special steps are inserted in the process, the refractive index profiles will be rounded at points where the refractive index changes sharply. The rounding is due to diffusion of the dopant materials used to change the base glass refractive index. Thus any of these index profiles may be rounded at particular points. For example, a step index profile, having a positive $\Delta\%$ will typically have rounded upper and lower corners.

Set forth below in Table 1 are preferred parameters for radius vs. delta for a 3 segment profile which may be used to form a negative dispersion, negative dispersion slope fiber segment for use in the present invention. As can be seen in the table, the fiber may or may not include a central recessed index area, such as is commonly caused by migration of the germania dopant.

Table 1

	Radius (micron)	Delta (%)
r_1	1.25 – 5	0.5 – 2
r_2	1.25 – 10	-0.5 - -0.1
r_3	2.5 – 15	0.1 - 1.0

A core segment tablet of the negative dispersion fiber illustrated in Fig. 1 was combined with conventional single mode fiber (SMF28) having a positive dispersion and positive dispersion slope and drawn into a fiber. The fiber illustrated by solid line in Fig. 1 exhibits a negative dispersion, i.e., about -35 ps/nm.km and a dispersion slope of about .15 ps/nm².km at 1550 nm. Thus, in this case, $(D_{SMF}/S_{SMF}) = 17/0.06 = 280$, whereas $(D_n/S_n) = -35/.15 = -233$. Consequently, $(D_p/S_p)/(D_n/S_n) = .83$, which is quite close to 1, as is desirable.

Fig. 2 illustrates such a four segment fiber core profile which is useful as a negative dispersion slope dispersion fiber segment in accordance with the

invention. The profile illustrated in Fig. 2 incorporates two index depressed regions 12 and 16.

Set forth below in Table II are preferred parameters for radius vs. delta for various such four segment profiles which may be used to form the negative dispersion, negative dispersion slope fiber segment which may be used in the present invention.

Table II

	Radius (micron)	Delta (%)
r_1	1.25 – 5	0.5 – 2
r_2	1.25 – 10	-0.5 - -0.1
r_3	2.5 – 15	0.1 – 1.0
r_4	5 – 25	-0.5 – 0

Any of the profiles disclosed herein may also include a centerline dip section, which is an area of depressed relative refractive index which is less than the peak delta of the first major core segment. Such centerline dips are commonly caused by so called burn-out, or migration of dopant ions, which sometimes occurs during manufacture of optical fiber waveguides.

The waveguides in accordance with the invention preferably exhibit a dispersion over the range of 1520 to 1625 nm which at all times has a magnitude which is less than 2, and more preferably less than 1 ps/nm²-km. The total dispersion of the waveguide fiber is in the range of about -2.0 to +2.0, more preferably about -1.0 to +1.0, and most preferably about -0.5 to +0.5 ps/nm-km at 1550 nm. The r_i , Δ_i %, and the refractive index profiles of the various positive and negative dispersion segments are also selected to provide a total attenuation at 1550 nm no greater than 0.25 dB/km.

All of these properties are achieved while maintaining high strength, good fatigue resistance, and good bend resistance, i.e., an induced bend loss no greater than about 0.5 dB, for 1 turn about a 32 mm mandrel, and no greater than .05 dB for 100 turns around a 75 mm mandrel. The waveguides in accordance with the invention are also compatible with optical amplifiers.

Also, cut off wavelength of fiber in cabled form is less than 1520 nm. An added benefit is a polarization mode dispersion less than about $.5 \text{ ps}/(\text{km})^{1/2}$, more preferably less than $.3 \text{ ps}/(\text{km})^{1/2}$.

One particularly preferred dispersion managed waveguide of the present invention manages fiber chromatic dispersion by providing a negative total dispersion as well as a low dispersion slope. In systems in which the suppression of potential soliton formation is important, it is desirable that the total dispersion of the waveguide fiber be negative, so that the linear dispersion cannot counteract the non-linear self phase modulation which occurs for high power signals.

To equalize fiber chromatic dispersion the following relation should preferably be satisfied as closely as possible:

$$D_p L_p + D_n L_n = 0,$$

where D and L stand for dispersion and fiber length, the subscripts "p" and "n" stand for positive and negative dispersion fiber components. Furthermore, in order to equalize the dispersion slope, the following relation should preferably be satisfied as closely as possible:

$$(D_p/S_p)/(D_n/S_n) = 1, \text{ where } S \text{ is the dispersion slope.}$$

The waveguides described herein are suitable for use in high power and long distance transmission applications, including conventional RZ (return to zero) or NRZ (non-return to zero), as well as soliton transmission applications. The definition of high power and long distance is meaningful only in the context of a particular telecommunication system wherein a bit rate, a bit error rate, a multiplexing scheme, and perhaps optical amplifiers are specified.

There are additional factors, known to those skilled in the art, which have impact upon the meaning of high power and long distance. However, for most purposes, high power is an optical power greater than about 10 mW per channel. In some applications, signal power levels of 1 mW or less are still sensitive to non-linear effects, so that A_{eff} is still an important consideration in such lower power systems.

A long distance is one in which the distance between electronic regenerators can be in excess of 100 to 120 km. The regenerators are to be distinguished from repeaters which make use of optical amplifiers. Repeater

spacing, especially in high data density systems, can be less than half the regenerator spacing.

The invention will be further clarified by the following example which is intended to be exemplary of the invention.

5

EXAMPLE

A particularly preferred three segment refractive index profile for use as the negative dispersion, negative slope fiber segment is illustrated in Fig. 3.

10

This particular profile exhibits a dispersion of -35.47 ps/nm.km and slope of -0.1018 ps/nm².km at 1550 nm. The cutoff wavelength is 1.18 micron and pin-array bend loss of 1.3 dB, MFD of 4.8 micron and Deff of 4.68 micron at 1550 nm.

15

Fig. 4 illustrates the dispersion characteristics of achieved when a positive dispersion fiber component, in this case SMF-28, is combined with the negative dispersion fiber component of the variety disclose in Fig. 3 variety having the following parameters:

	Delta (%)	Radius (μ m)
Core	2	2.2 (r_1)
First moat	-0.4	5.76 (r_2)
Ring	0.6	6.72 (r_3)

20

Table III below lists the resultant dispersion and dispersion slope properties, as well as the ratio of dispersion to dispersion slope which is achieved by this combination of alternating fiber segments.

Table III

	+D Fiber	-D Fiber
D (ps/nm.km)	17	-35
S (ps/nm ² .km)	0.058	-0.1018
D/S (nm)	293	350

Fig. 5 illustrates the axial design of the resultant waveguide fiber, in terms of dispersion over waveguide length (nm.km) for the resultant dispersion flattened, dispersion managed fiber.

Fig. 6 illustrates the resultant total dispersion characteristics of the dispersion flattened and managed fiber. L_p/L_n is about 2:1 in this example. The period L_n+L_p is approximately 3 km. As can be seen in Fig. 6., for this design example, total dispersion is much less than 1 ps/nm.km, and in fact is less than about 0.5 ps/nm.km, from 1520 to 1620 nm. This is consistent with the low loss window of single mode fibers. According to the loss spectrum of a conventional single mode fiber, the attenuation is less than .22 dB/km from 1520 to 1620 nm.

It will be apparent to those skilled in the art that various modifications and variations can be made to the present invention without departing from the spirit and scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. A single mode optical waveguide comprising: a first fiber component having positive dispersion and positive dispersion slope and a second fiber
5 component having a negative dispersion and a negative dispersion slope.
2. The waveguide of claim 1, wherein said first fiber component has a length which is at least two times the length of said second fiber component.
- 10 3. The waveguide of claim 1, wherein said first fiber component has a length which is at least five times the length of said second fiber component.
4. The waveguide of claim 1, wherein the first and second fiber components are selected so that said waveguide exhibits a dispersion over the range of
15 1520 to 1625 nm which at all times has a magnitude which is less than 2 ps/nm²-km.
5. The waveguide of claim 1, wherein the first and second fiber components are selected so that said waveguide exhibits a dispersion over the range of
20 1520 to 1625 nm which at all times has a magnitude which is less than 1 ps/nm²-km.
6. The waveguide of claim 1, wherein the first and second fiber components are selected so that said waveguide exhibits a total dispersion in the range of
25 about -2.0 to +2.0 ps/nm-km at 1550 nm.
7. The waveguide of claim 1, wherein the first and second fiber components are selected so that said waveguide exhibits a total dispersion in the range of
30 about -2.0 to 0.0 ps/nm-km at 1550 nm.

8. The waveguide of claim 7, wherein said waveguide exhibits an induced bend loss no greater than about 0.5 dB, for 1 turn about a 32 mm mandrel, a cut off wavelength of fiber in cabled form is less than 1520 nm, and a polarization mode dispersion less than about $.5 \text{ ps}/(\text{km})^{1/2}$.

9. The waveguide of claim 1, wherein said waveguide comprises a cabled waveguide, and said waveguide is disposed between amplifiers, and said first component is at least 50 km in length, and said second fiber component is less than 20 km in length.

10. The waveguide of claim 1, wherein said waveguide comprises a cabled waveguide, and said waveguide is disposed between amplifiers, and said first component is at least 75 km in length, and said second fiber component is less than 15 km in length.

11. The waveguide of claim 1, wherein said first fiber component comprises single mode fiber having a step index profile.

12. The single mode optical fiber of claim 11, wherein said second fiber component comprises a core having at least three segments, wherein the first segment has an outer radius r_1 in the range of about 1.25 to 5.0 μm a Δ_1 % in the range of about 0.5 to 2.0 %, the second segment has an outer radius r_2 in the range of about 1.25 to 10.0 μm and a Δ_2 % in the range of about -0.5 to about -0.1 %, and the third second segment has an outer radius r_3 in the range of about 2.5 to 15.0 μm and a Δ_3 % in the range of about 0.1 to about 1.0 %.

13. The single mode optical fiber of claim 12, wherein said second fiber component further comprises a fourth segment having an outer radius r_2 in the range of about 5.0 to 25.0 μm a Δ_2 % in the range of about -0.5 to -0.05 %.

14. A single mode optical waveguide comprising: a first fiber component having positive dispersion and positive dispersion slope and a second fiber

component having a negative dispersion and a negative dispersion slope, wherein said first fiber component has a length which is at least two times the length of said second fiber component, and the profiles of the first and second fiber components are selected so that said waveguide exhibits a dispersion over the range of 1520 to 1625 nm which at all times has a magnitude which is less than $2 \text{ ps/nm}^2\text{-km}$.

15. The waveguide of claim 14, wherein said first fiber component has a length which is at least five times the length of said second fiber component.

16. The waveguide of claim 15, wherein the first and second fiber components are selected so that said waveguide exhibits a dispersion over the range of 1520 to 1625 nm which at all times has a magnitude which is less than $1 \text{ ps/nm}^2\text{-km}$.

17. The waveguide of claim 14, wherein the first and second fiber components are selected so that said waveguide exhibits a total dispersion in the range of about -2.0 to $+2.0 \text{ ps/nm-km}$ at 1550 nm.

18. The waveguide of claim 17, wherein said first fiber component comprises single mode fiber having a step index profile, and said second fiber component comprises a core having at least three segments, wherein the first segment has an outer radius r_1 in the range of about 1.25 to $5.0 \text{ }\mu\text{m}$ and a $\Delta_1 \%$ in the range of about 0.5 to 2.0% , the second segment has an outer radius r_2 in the range of about 1.25 to $10.0 \text{ }\mu\text{m}$ and a $\Delta_2 \%$ in the range of about -0.5 to about -0.1% , and the third second segment has an outer radius r_3 in the range of about 2.5 to $15.0 \text{ }\mu\text{m}$ and a $\Delta_3 \%$ in the range of about 0.1 to about 1.0% .

19. The single mode optical fiber of claim 1, wherein the second fiber component is retained within an optical amplifier.

FIG.1

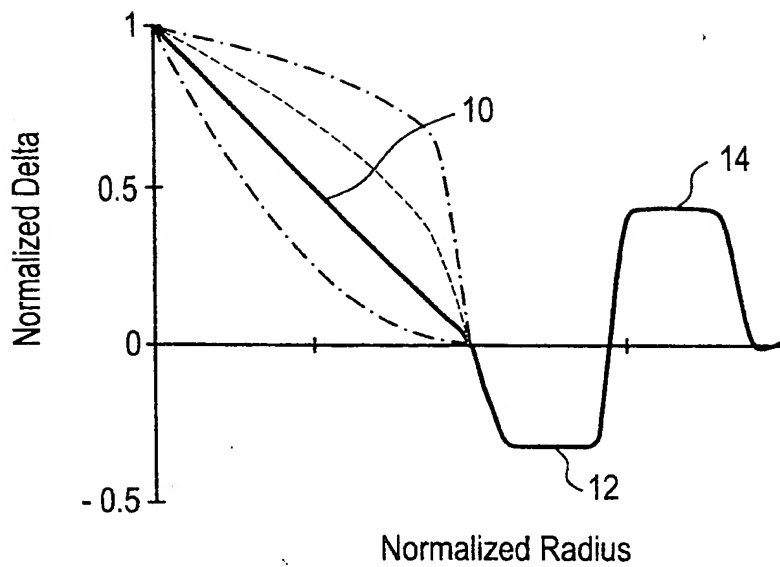


FIG.2

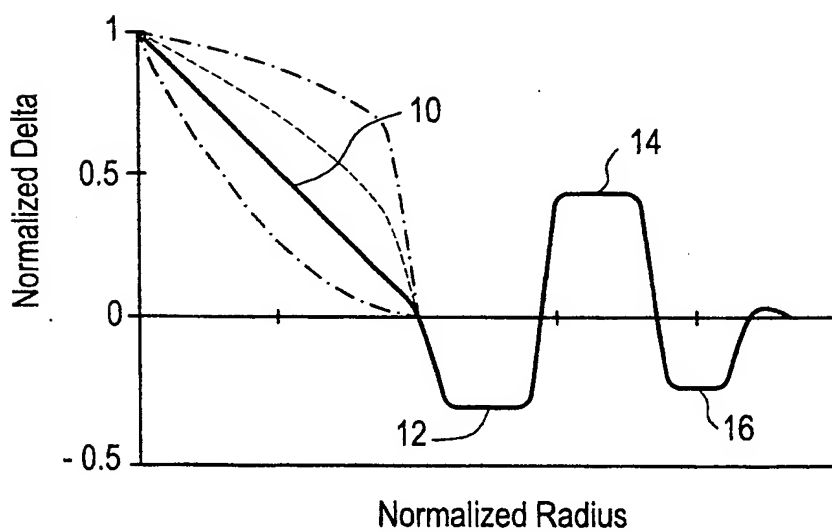


FIG.3

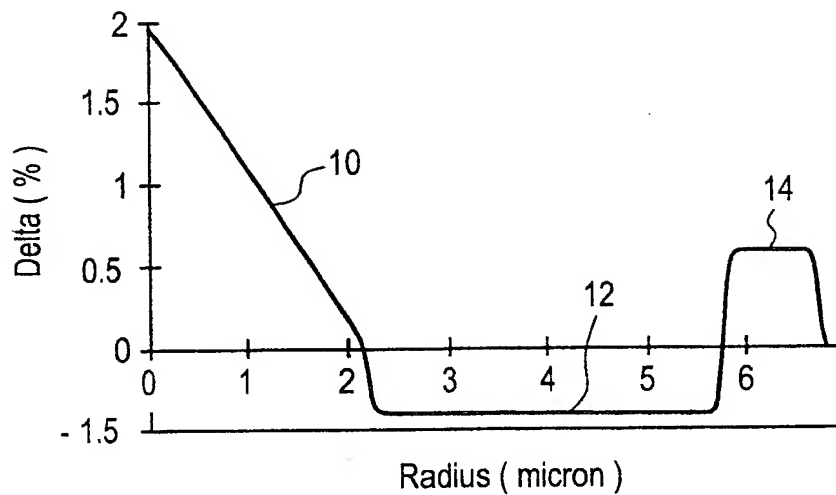


FIG.4

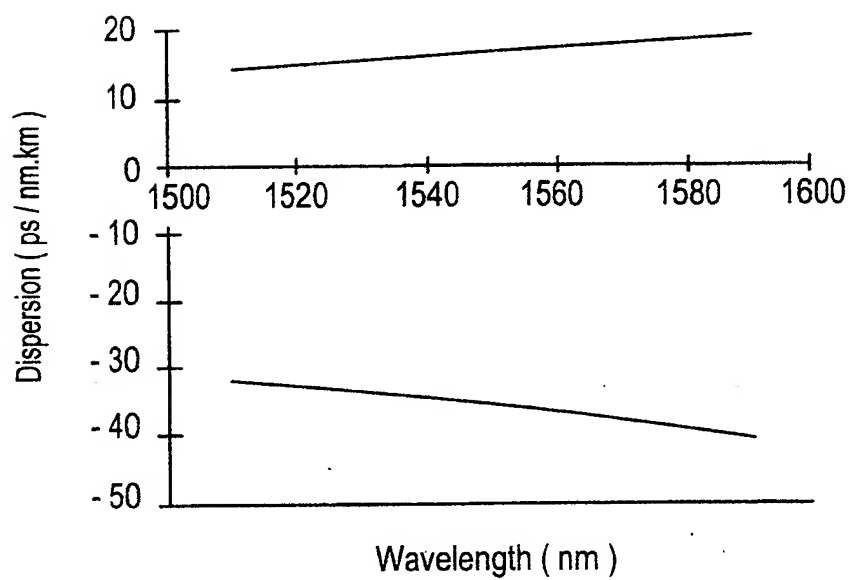


FIG.5


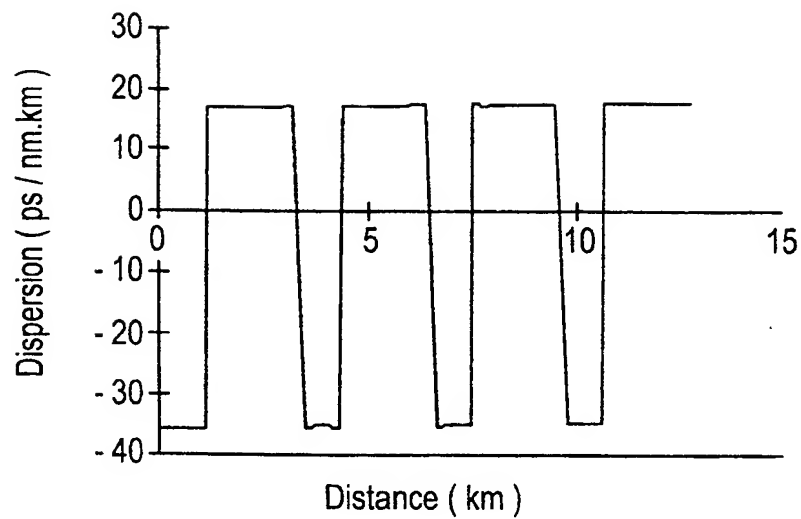


FIG.6

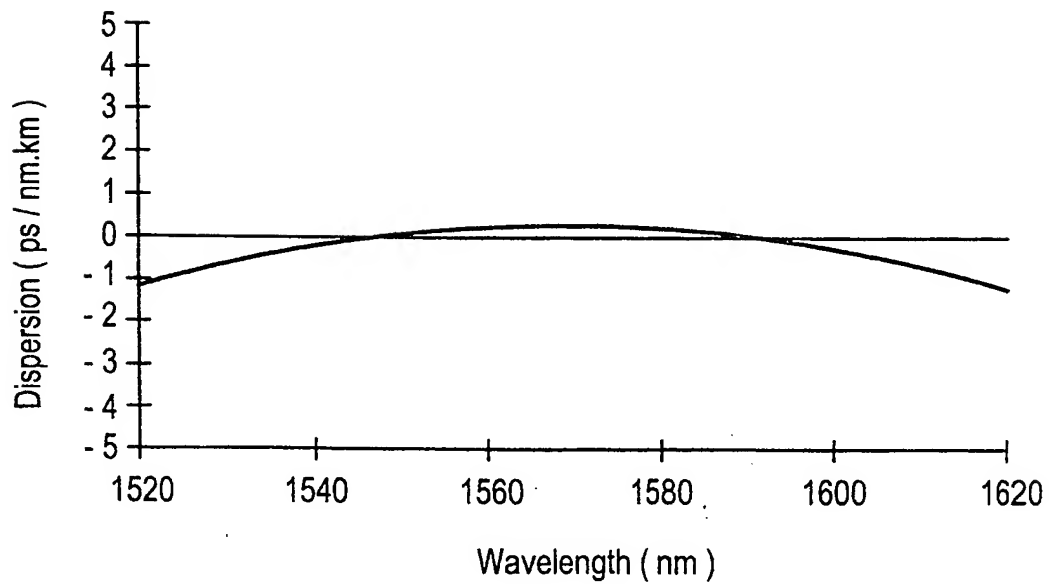

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/03403

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G02B 6/16

US CL : 385/123, 124, 127

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 385/123, 124, 126, 127

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

USPTO APS

search terms: waveguide#, optic##(2a)(fiber# or fibre#), dispersion, negative and positive, segment#, single mode

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P ----- Y,P	US 5,778,128 A (Wildeman) 07 July 1998 (07.07.98), see abstract, column 3 lines 54-58, column 4 lines 18-49, and column 5 lines 1-14	1-7, 9-11 ----- 8, 12-19
Y,P	US 5,781,684 A (Liu) 14 July 14, 1998 (14.07.98), see abstract, figures 5c-11, column 4 line 43 to column 6 line 47	8, 12-19

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 MAY 1999

Date of mailing of the international search report

27 MAY 1999

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

 JULIANA K. KANG *J. Kang*
 Telephone No. (703) 305-6259



RAPPORT DE RECHERCHE PRÉLIMINAIRE

établi sur la base des dernières revendications
déposées avant le commencement de la recherche

N° d'enregistrement
national

FA 621874
FR 0209136

DOCUMENTS CONSIDÉRÉS COMME PERTINENTS		Revendication(s) concernée(s)	Classement attribué à l'invention par l'INPI
Catégorie	Citation du document avec indication, en cas de besoin, des parties pertinentes		
① X	WO 01 92928 A (CORNING INC) 6 décembre 2001 (2001-12-06)	1-5, 9, 11, 19-23	G02B6/22 H04B10/18
Y	* abrégé * * figure 1 * * page 19 - page 20 *	13-18	H04J14/02
② Y	US 6 421 490 B1 (LIU YANMING) 16 juillet 2002 (2002-07-16)	13-18	
	* figure 2; tableau 2 *		
③ X	EP 1 116 697 A (SAMSUNG ELECTRONICS CO LTD) 18 juillet 2001 (2001-07-18)	1, 19	
	* abrégé; figure 4 *		
④ X	US 2001/008077 A1 (BERKEY GEORGE E) 19 juillet 2001 (2001-07-19)	1	
	* abrégé *		
⑤ A	US 2002/090186 A1 (FLEURY LUDOVIC ET AL) 11 juillet 2002 (2002-07-11)		
⑥ A	US 2002/076186 A1 (DE MONTMORILLON ET AL.) 20 juin 2002 (2002-06-20)		
⑦ A	WO 99 42869 A (CORNING INC ; LIU YANMING (US)) 26 août 1999 (1999-08-26)		
⑧ A	US 6 396 987 B1 (CHARIOT JEAN-FRANCOIS ET AL) 28 mai 2002 (2002-05-28)		
<p>See attached translation sheet ligne = line revendications - claims colonne = column abrege = summary/abstract</p>			
Date d'achèvement de la recherche		Examineur	
24 mars 2003		Verbandt, Y	
<p>CATÉGORIE DES DOCUMENTS CITÉS</p> <p>X : particulièrement pertinent à lui seul Y : particulièrement pertinent en combinaison avec un autre document de la même catégorie A : arrière-plan technologique O : divulgation non-écrite P : document intercalaire</p> <p>T : théorie ou principe à la base de l'invention E : document de brevet bénéficiant d'une date antérieure à la date de dépôt et qui n'a été publié qu'à cette date de dépôt ou qu'à une date postérieure. D : cité dans la demande L : cité pour d'autres raisons & : membre de la même famille, document correspondant</p>			

ANNEXE AU RAPPORT DE RECHERCHE PRÉLIMINAIRE

RELATIF A LA DEMANDE DE BREVET FRANÇAIS NO. FR 0209136 FA 621874

La présente annexe indique les membres de la famille de brevets relatifs aux documents brevets cités dans le rapport de recherche préliminaire visé ci-dessus.

Les dits membres sont contenus au fichier informatique de l'Office européen des brevets à la date du 24-03-2003

Les renseignements fournis sont donnés à titre indicatif et n'engagent pas la responsabilité de l'Office européen des brevets, ni de l'Administration française

Document brevet cité au rapport de recherche		Date de publication		Membre(s) de la famille de brevet(s)	Date de publication
WO 0192928	A	06-12-2001	AU	6302701 A	11-12-2001
			EP	1292851 A2	19-03-2003
			WO	0192928 A2	06-12-2001
			US	2002003938 A1	10-01-2002
US 6421490	B1	16-07-2002	US	2002191927 A1	19-12-2002
			AU	750557 B2	25-07-2002
			AU	3180599 A	06-09-1999
			BR	9907943 A	24-10-2000
			CA	2318423 A1	26-08-1999
			CN	1288523 T	21-03-2001
			EP	1066540 A1	10-01-2001
			JP	2002504702 T	12-02-2002
			WO	9942869 A1	26-08-1999
EP 1116697	A	18-07-2001	EP	1116697 A2	18-07-2001
			JP	2001199736 A	24-07-2001
			KR	2001086347 A	10-09-2001
			US	2001041038 A1	15-11-2001
US 2001008077	A1	19-07-2001	US	5894537 A	13-04-1999
			US	6173588 B1	16-01-2001
			US	2002069677 A1	13-06-2002
			AU	693329 B2	25-06-1998
			AU	5046196 A	24-10-1996
			BR	9601344 A	13-01-1998
			CA	2174055 A1	14-10-1996
			CN	1165305 A	19-11-1997
			DE	69621974 D1	01-08-2002
			DE	69621974 T2	16-01-2003
			DK	737873 T3	21-10-2002
			EP	0737873 A2	16-10-1996
			EP	0949519 A1	13-10-1999
			EP	0949520 A1	13-10-1999
			JP	8320419 A	03-12-1996
			RU	2178901 C2	27-01-2002
			US	6044191 A	28-03-2000
			AU	733718 B2	24-05-2001
			AU	3203697 A	19-11-1997
			BR	9702176 A	02-03-1999
			CA	2220416 A1	06-11-1997
			EP	0835227 A1	15-04-1998
			JP	11513968 T	30-11-1999
			RU	2169710 C2	27-06-2001
			WO	9741076 A1	06-11-1997

EPO FORM P0465

Pour tout renseignement concernant cette annexe : voir Journal Officiel de l'Office européen des brevets, No.12/82

ANNEXE AU RAPPORT DE RECHERCHE PRÉLIMINAIRE
RELATIF A LA DEMANDE DE BREVET FRANÇAIS NO. FR 0209136 FA 621874

La présente annexe indique les membres de la famille de brevets relatifs aux documents brevets cités dans le rapport de recherche préliminaire visé ci-dessus.
 Les dits membres sont contenus au fichier informatique de l'Office européen des brevets à la date du 24-03-2003
 Les renseignements fournis sont donnés à titre indicatif et n'engagent pas la responsabilité de l'Office européen des brevets, ni de l'Administration française

Document brevet cité au rapport de recherche	Date de publication	Membre(s) de la famille de brevet(s)	Date de publication
US 2002090186 A1	11-07-2002	FR 2815418 A1	19-04-2002
		CN 1373569 A	09-10-2002
		CN 1373374 A	09-10-2002
		EP 1217399 A1	26-06-2002
		EP 1213595 A2	12-06-2002
		FR 2815420 A1	19-04-2002
		JP 2002182057 A	26-06-2002
		JP 2002185404 A	28-06-2002
		US 2002076185 A1	20-06-2002
US 2002076186 A1	20-06-2002	FR 2816065 A1	03-05-2002
		CN 1351267 A	29-05-2002
		EP 1202088 A1	02-05-2002
		JP 2002182053 A	26-06-2002
WO 9942869 A	26-08-1999	AU 750557 B2	25-07-2002
		AU 3180599 A	06-09-1999
		BR 9907943 A	24-10-2000
		CA 2318423 A1	26-08-1999
		CN 1288523 T	21-03-2001
		EP 1066540 A1	10-01-2001
		JP 2002504702 T	12-02-2002
		WO 9942869 A1	26-08-1999
		US 2002191927 A1	19-12-2002
		US 6421490 B1	16-07-2002
US 6396987 B1	28-05-2002	FR 2790107 A1	25-08-2000
		EP 1030199 A1	23-08-2000
		EP 1046069 A1	25-10-2000
		WO 0017681 A1	30-03-2000
		JP 2002525671 T	13-08-2002

**NATIONAL INSTITUTE
OF INDUSTRIAL PROPERTY**

SEARCH REPORT
drawn up on the ground of the
last claims filed before the
beginning of the search

DOCUMENTS CONSIDERED TO BE RELEVANT		Relevant to claim	
Category	Citation of document with indication, where appropriate, of relevant passages		
			Technical fields Searched (Int. CL. 7)
Date of completion of the search:		Examiner:	
CATEGORY OF CITED DOCUMENTS <div style="display: flex; justify-content: space-between;"> <div> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : relevant against at least one claim Or: technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> </div> <div> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document based on, or after the the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent or corresponding document</p> </div> </div>			

